



New Soundproof Genset Range



POWERING | A WINNING TEAM

FPT 2013 INTERNATIONAL DEALER CONVENTION

Standard version and rental version features




Engine type	Stand-by (kW)	Governor Regolatore	Cylinder Cilindri	Aspiration Aspirazione	Displac Cilindr.	POWER								According to European	Size / Dimensioni			Weight Peso
						50 Hz				60 Hz					Emissions	L	H	
Tipo motore	(4)				(l)	PRIME (1) kW	STAND-BY (2) kVA	PRIME (1) kW	STAND-BY (2) kVA	PRIME (1) kW	STAND-BY (2) kVA	PRIME (1) kW	STAND-BY (2) kVA					
GS F3230	30	mecc.	4 L	NA	3.2	24	30	26.5	33	--	--	--	--	stage II	2200	1450	930	~ 1010
GS F3240	40	mecc.	4 L	TC	3.2	32	40	35	44	--	--	--	--	stage II	2200	1450	930	~ 1090
GSNEF45	45	mecc.	4 L	TC	4.5	36	45	40	50	40	50	44	55	stage II	2550	1550	1030	~ 1230
GSNEF60	60	mecc.	4 L	TC	4.5	48	60	53	66	53	66	58	73	stage II	2550	1550	1030	~ 1315
GSNEF75	75	mecc.	4 L	TC	4.5	60	75	66	82	60	75	66	82	stage II	2800	1760	1130	~ 1420
GSNEF85	85	mecc.	4 L	TAA	4.5	68	85	75	94	80	100	88	110	stage II	2800	1760	1130	~ 1470
GSNEF100	100	mecc.	4 L	TAA	4.5	80	100	88	110	88	110	97	121	stage II	2800	1760	1130	~ 1555
GSNEF125	125	mecc.	6 L	TC	6.7	100	125	110	138	116	138	128	160	No emiss	3200	1900	1130	~ 1755
GSNEF130	130	mecc.	6 L	TAA	6.7	104	130	114	143	116	143	128	160	stage II	3200	1900	1130	~ 1795
GSNEF160	160	mecc.	6 L	TAA	6.7	128	160	141	176	136	170	150	187	stage II	3200	1900	1130	~ 1845
GSNEF200	200	CR	6 L	TAA	6.7	160	200	176	220	180	225	198	248	stage II	3200	1900	1130	~ 1900
GS CURSOR250	250	CR	6 L	TAA	8.7	200	250	220	275	216	270	238	297	stage II	3750	2100	1430	~ 3075
GS CURSOR300	300	EUI	6 L	TAA	10.3	240	300	264	330	280	330	308	363	stage II	4850	2500	1630	~ 3450
GS CURSOR350	350	EUI	6 L	TAA	12.9	280	350	308	385	304	380	334	418	stage II	4850	2500	1630	~ 3600
GS CURSOR400	400	EUI	6 L	TAA	12.9	320	400	352	440	336	420	370	462	stage II	4850	2500	1630	~ 3745

CONFIGURATION : L= in line/in linea - mecc= mechanical/meccanico - CR= Common rail - UEI = Electronic unit injector
 NA= Natural aspirated/aspirato - TC = Turbocharged/turbocompresso - TAA= turbocharged air cooled/turbocompresso con refrigerazione dell'aria


POWERING A WINNING TEAM

FPT 2013 INTERNATIONAL DEALER CONVENTION


New standard version

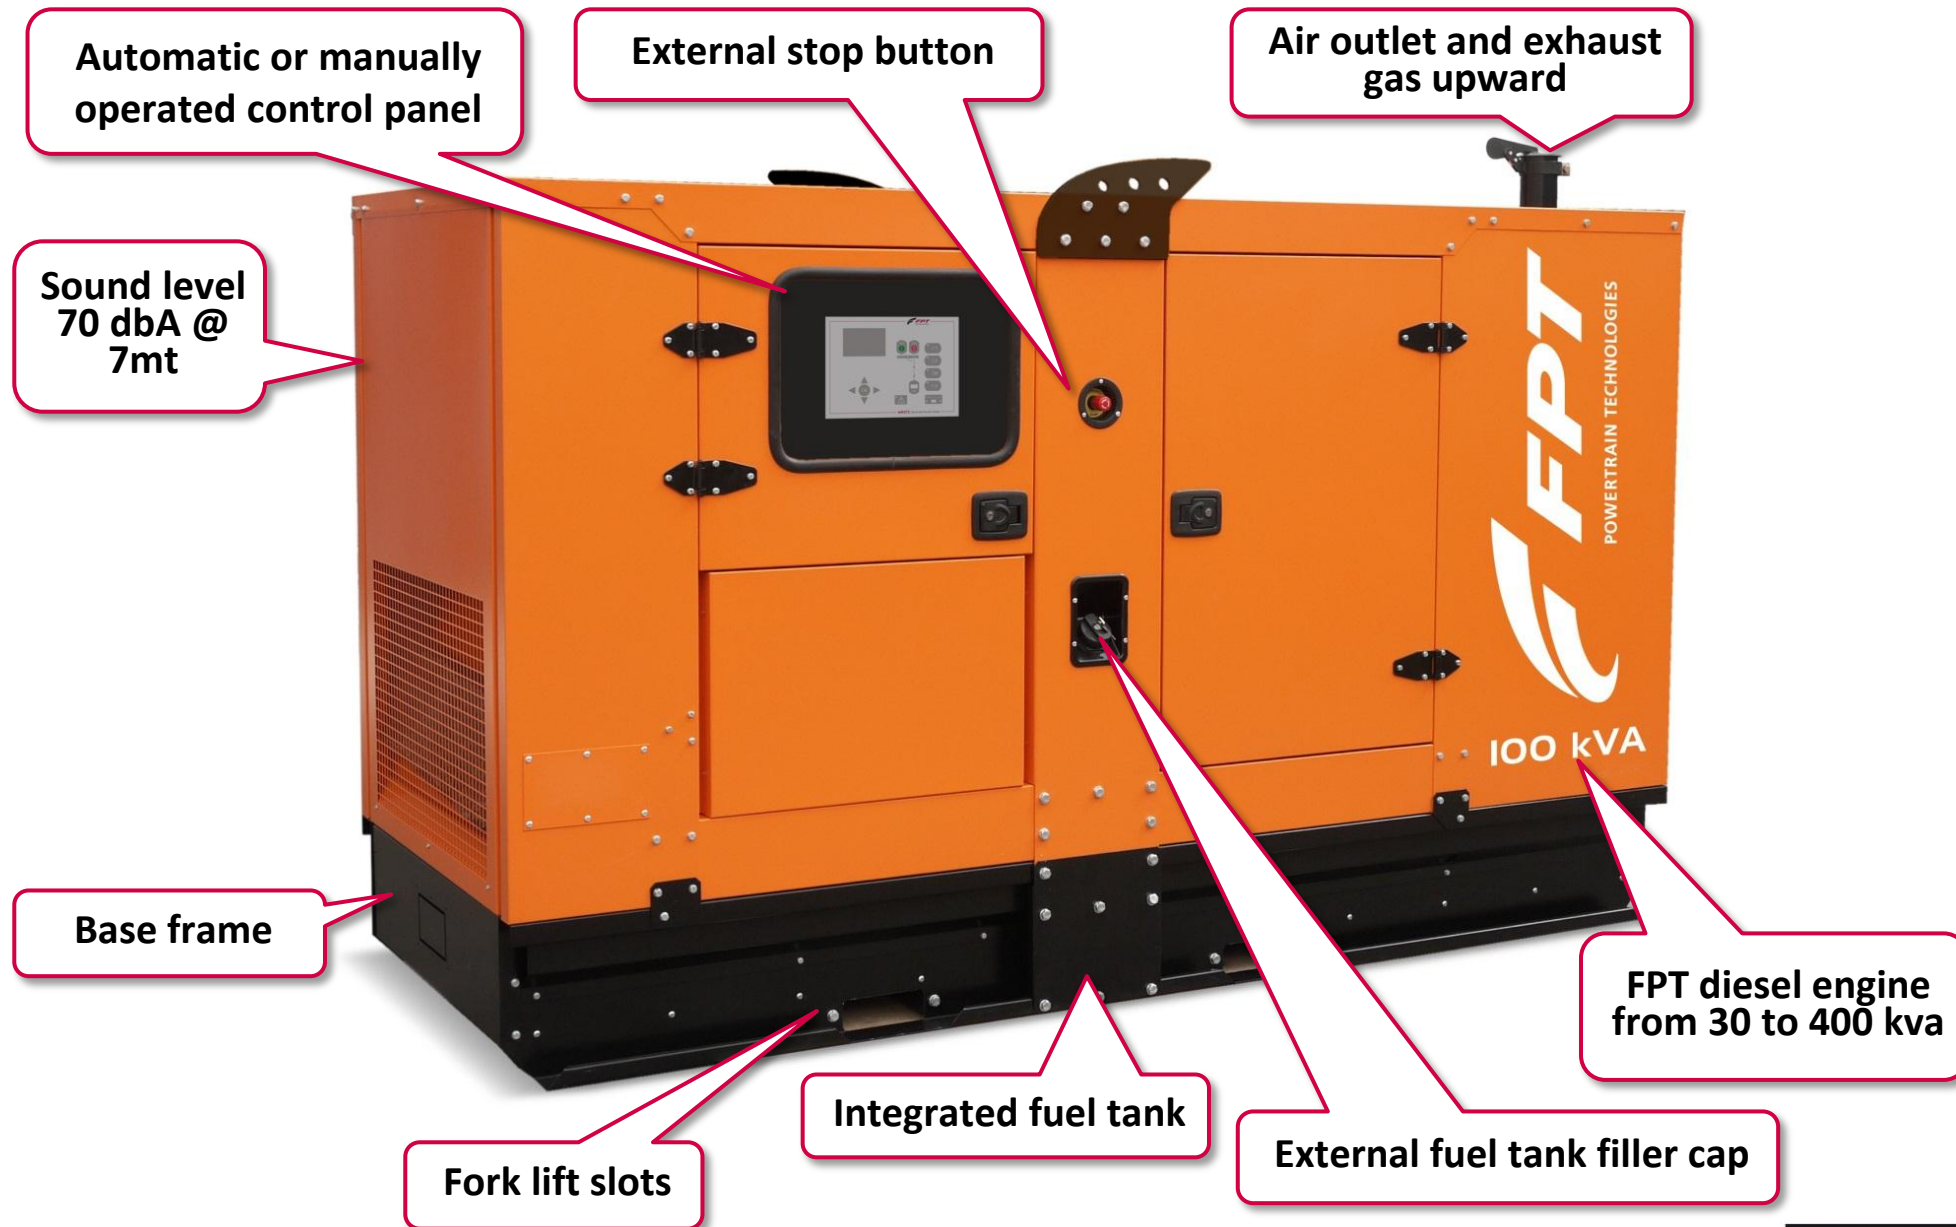

New rental version

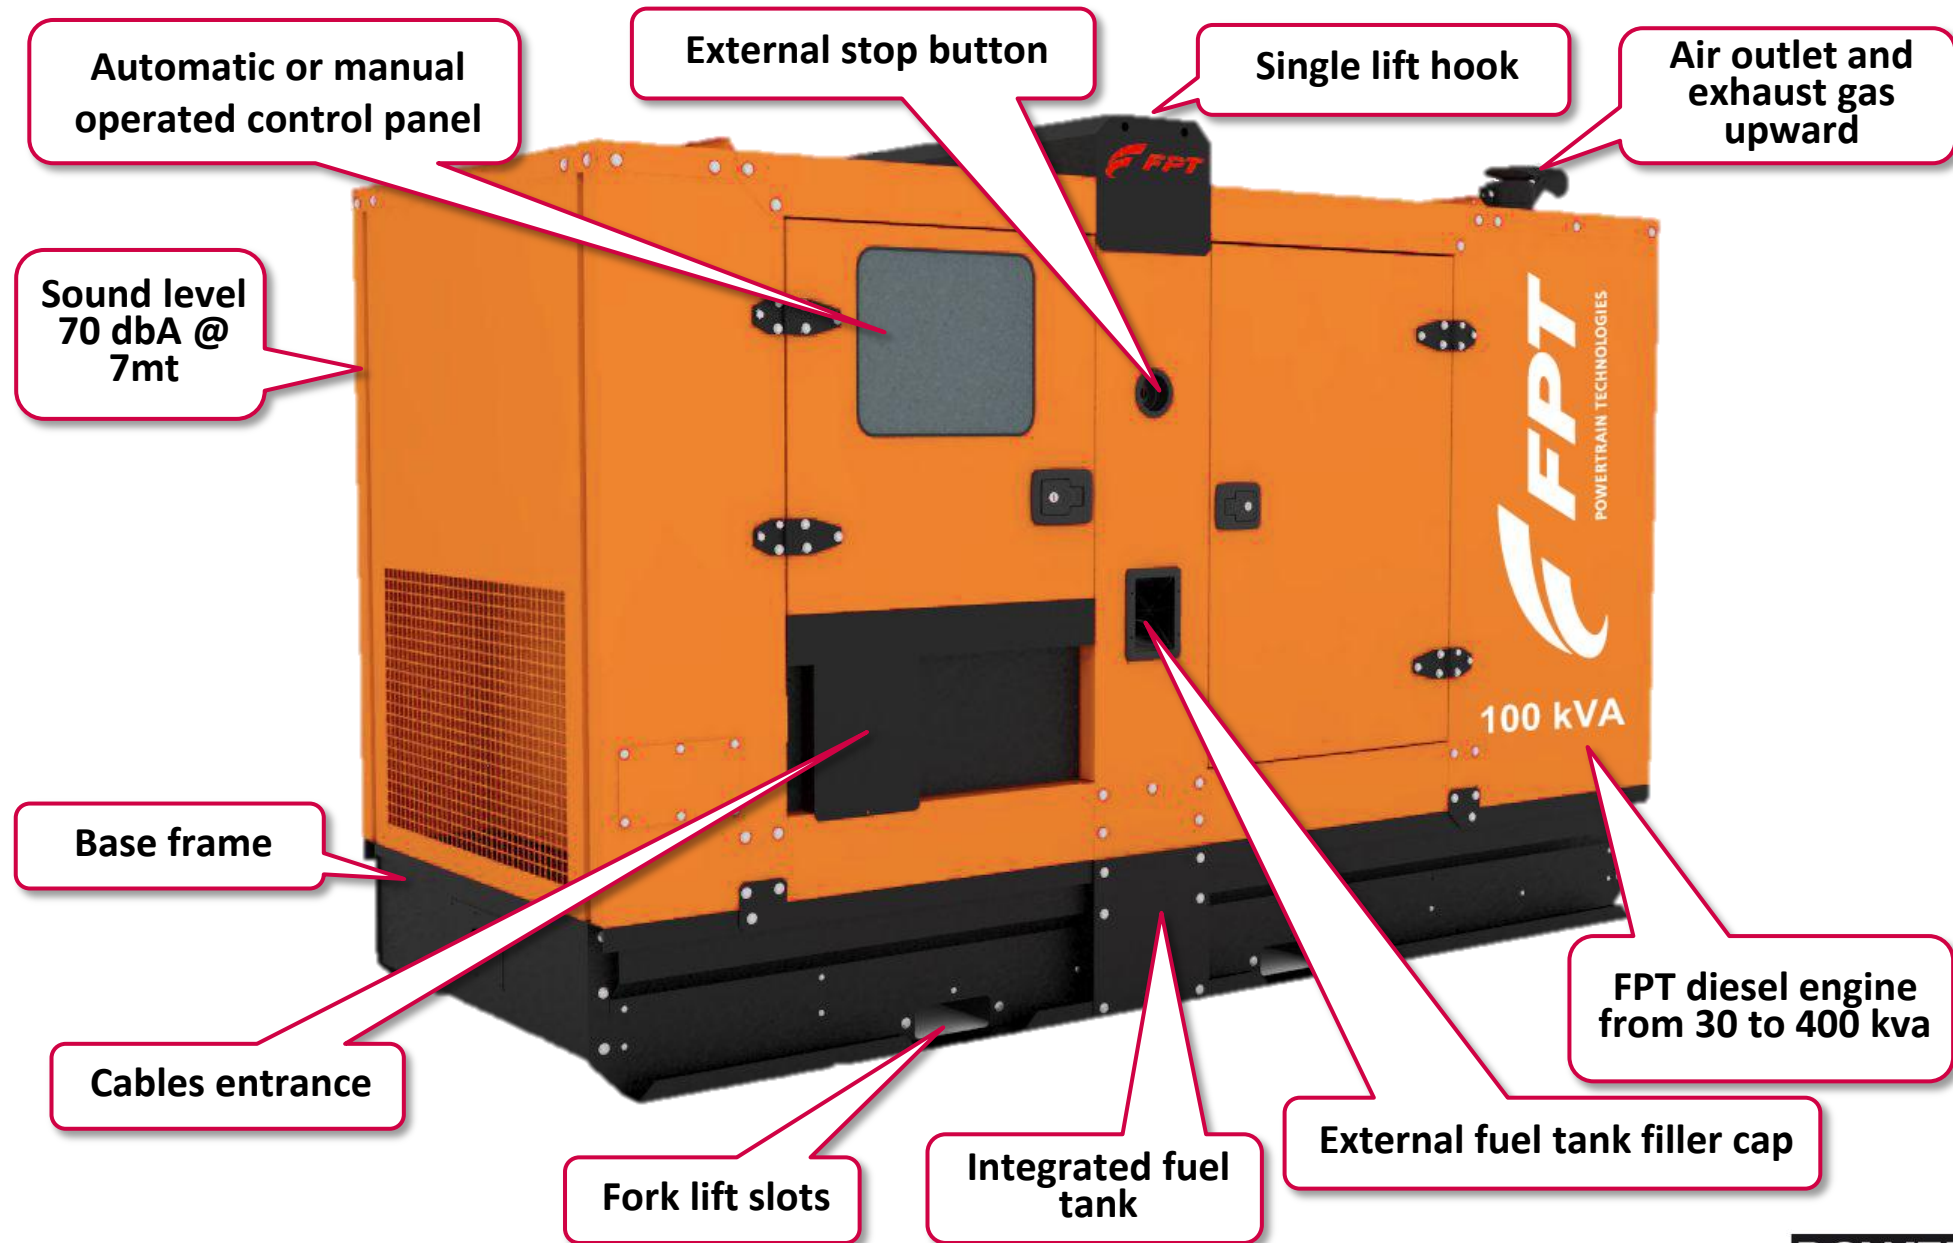

Genset line-up (in electrical stand-by power)

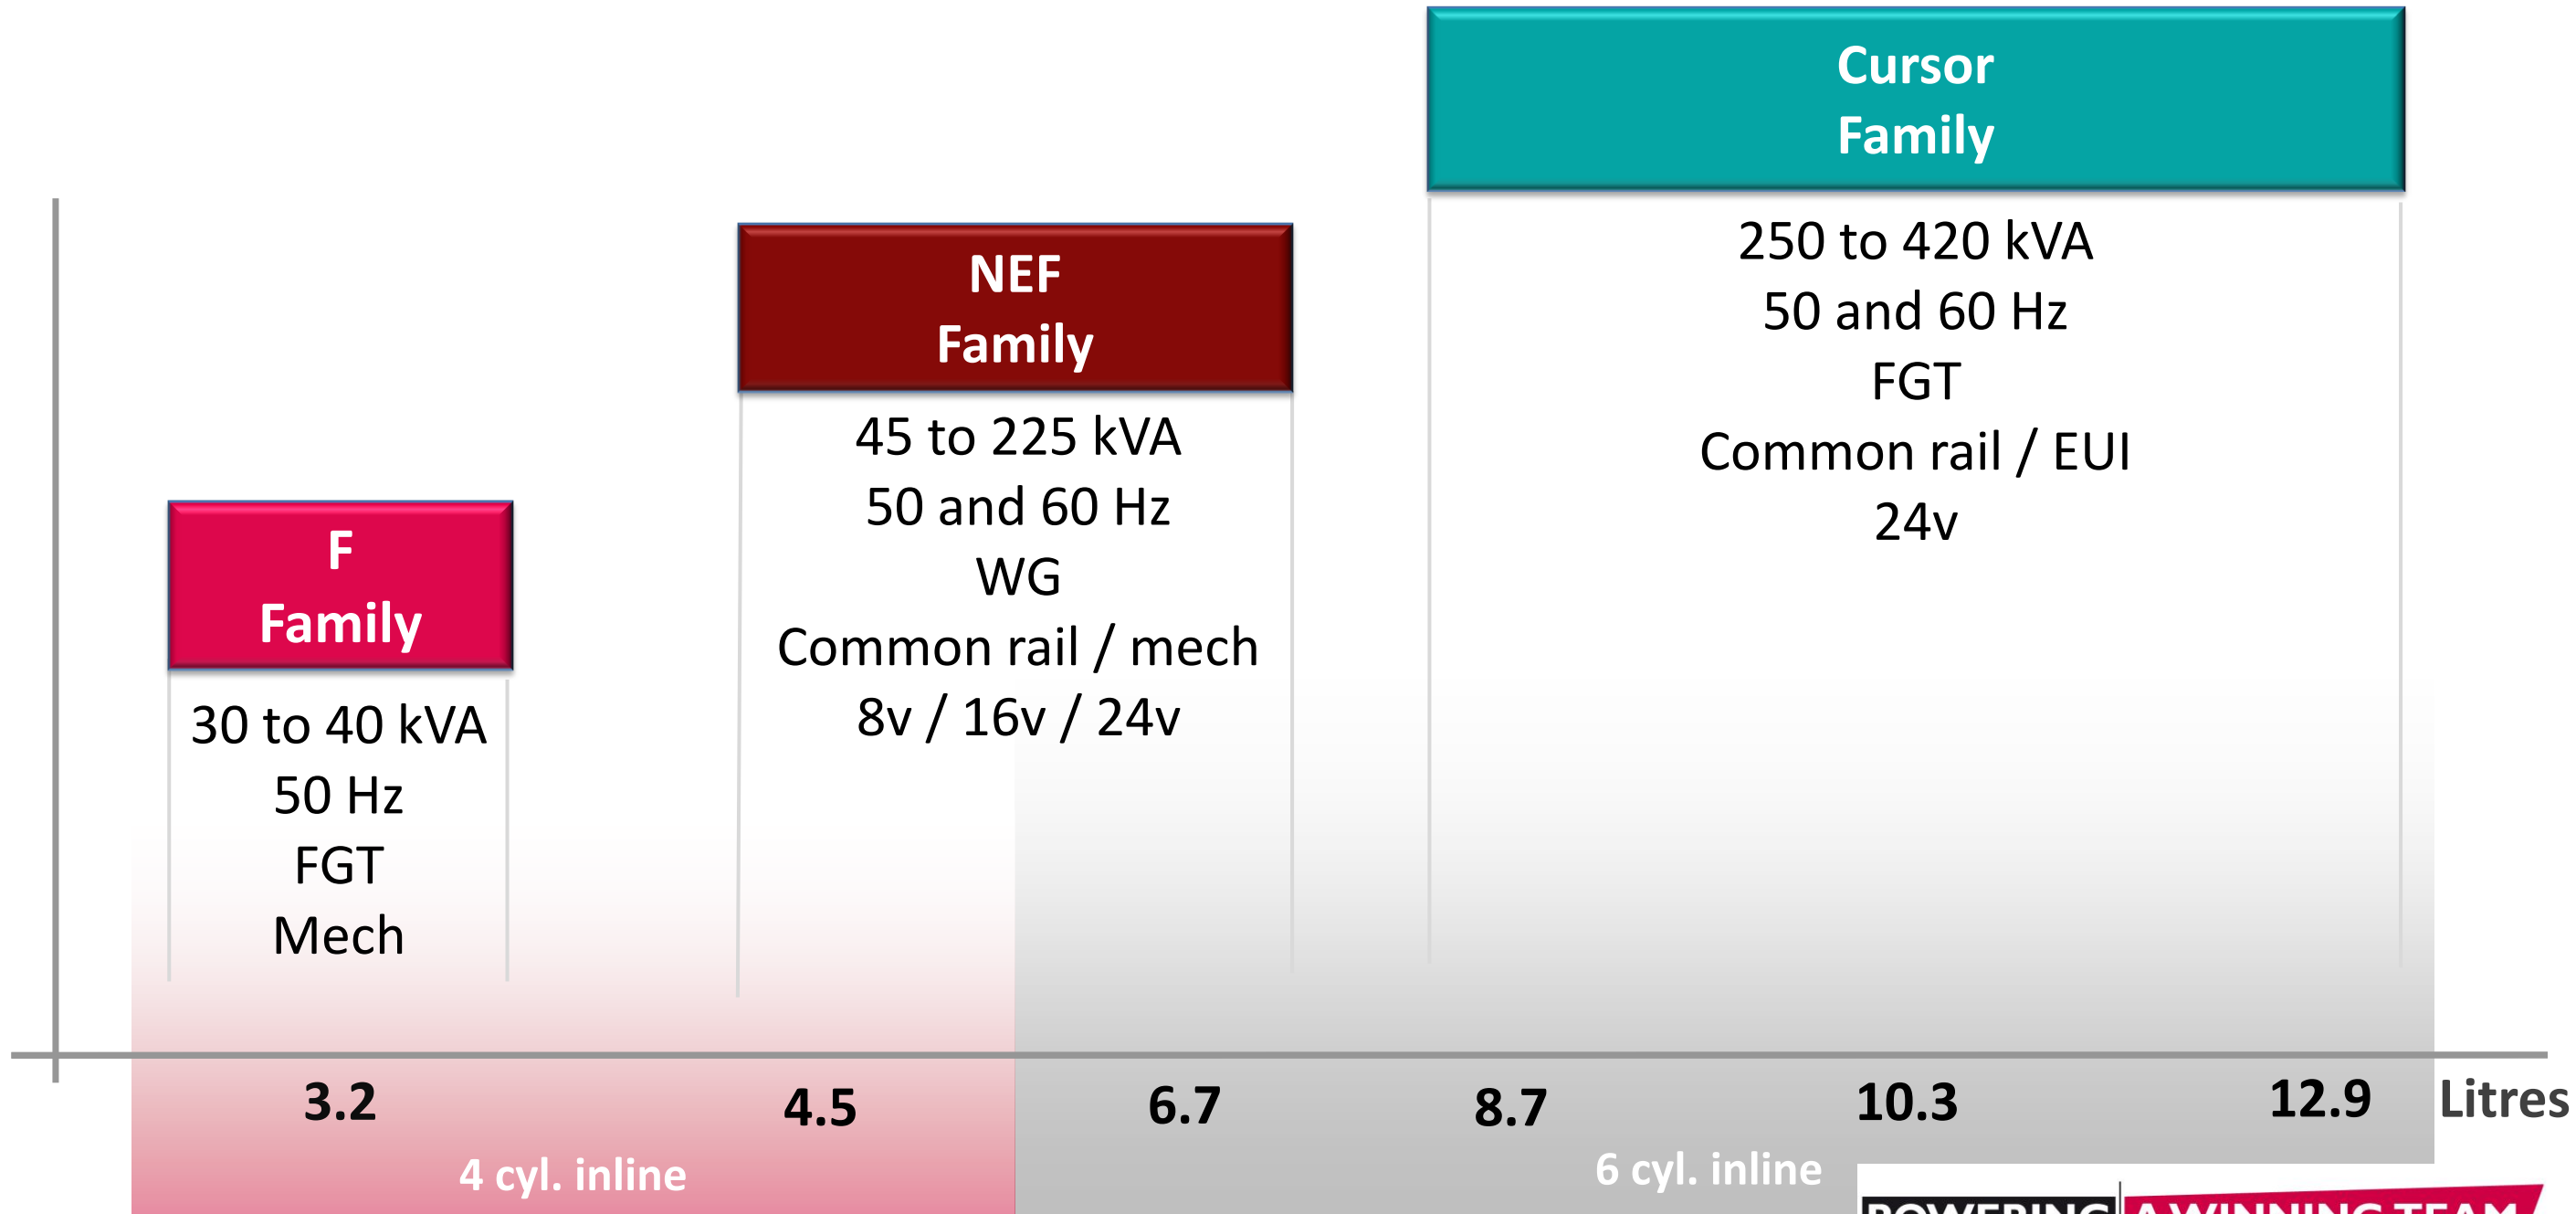


POWERING A WINNING TEAM

FPT 2013 INTERNATIONAL DEALER CONVENTION

Genset line-up (in electrical stand-by power)



Power nodes : Stand-by power in kVa @1,500 rpm

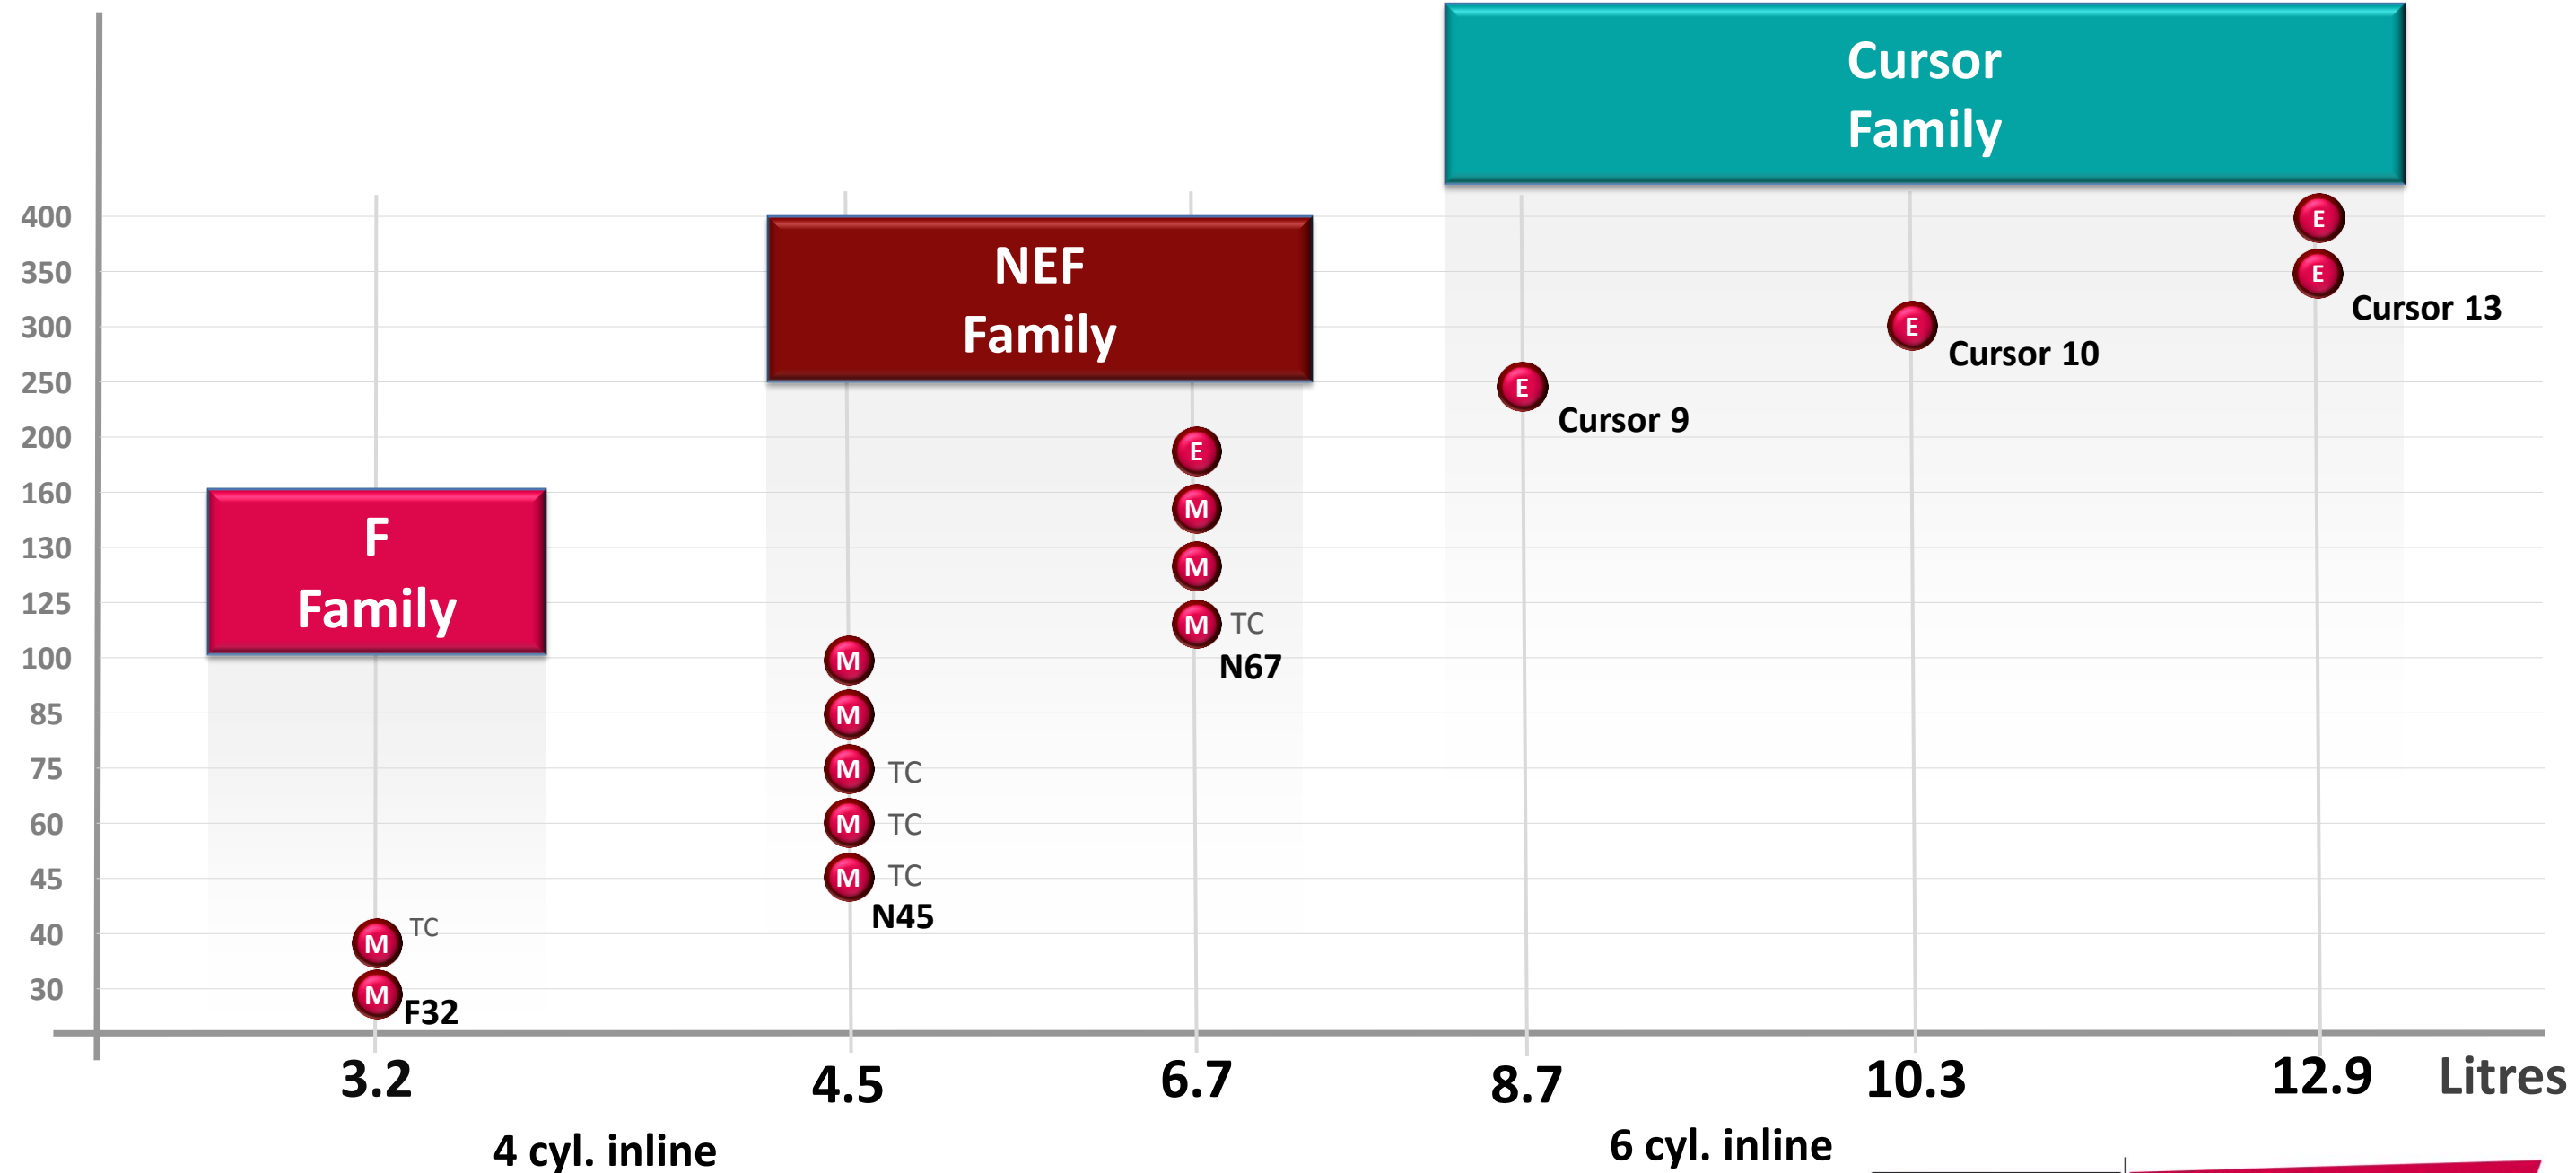

POWERING A WINNING TEAM


FPT 2013 INTERNATIONAL DEALER CONVENTION

Scope of supply

Components	Standard Version		Rental version	
	With manual panel	With automatic panel	With manual panel	With automatic panel
Engine	X		X	
Alternator	X		X	
Base frame with fork lift slots (NEW!)	X		X	
PVC fuel tank	X		X	
Canopy RAL 2003	X		X	
Engine and alternator wirings and cabling	X		X	
Manual control panel MRS72 (NEW!)	X		X	
Automatic AMF74 control panel (NEW!)		X		X
Four pole circuit breaker (NEW!)	X		X	
Packaging	X		X	
OP / WT / FL sensor	X		X	
Test certificate	X		X	
Battery charger		X		X
Water preheater		X		X
Liquid collection tank	option		X	
Central lifting eye	option		X	
Cables plug-in door	N/A		X	

Automatic panel AMF74

- Control of the generator with automatic management of the transfer from the main generator
- Graphic LCD display
- Five languages
- Real time clock with power reserve
- Storage of the last 250 events
- Support for remote installation and remote alarms
- Reprogrammable on-site by the operator with optical key

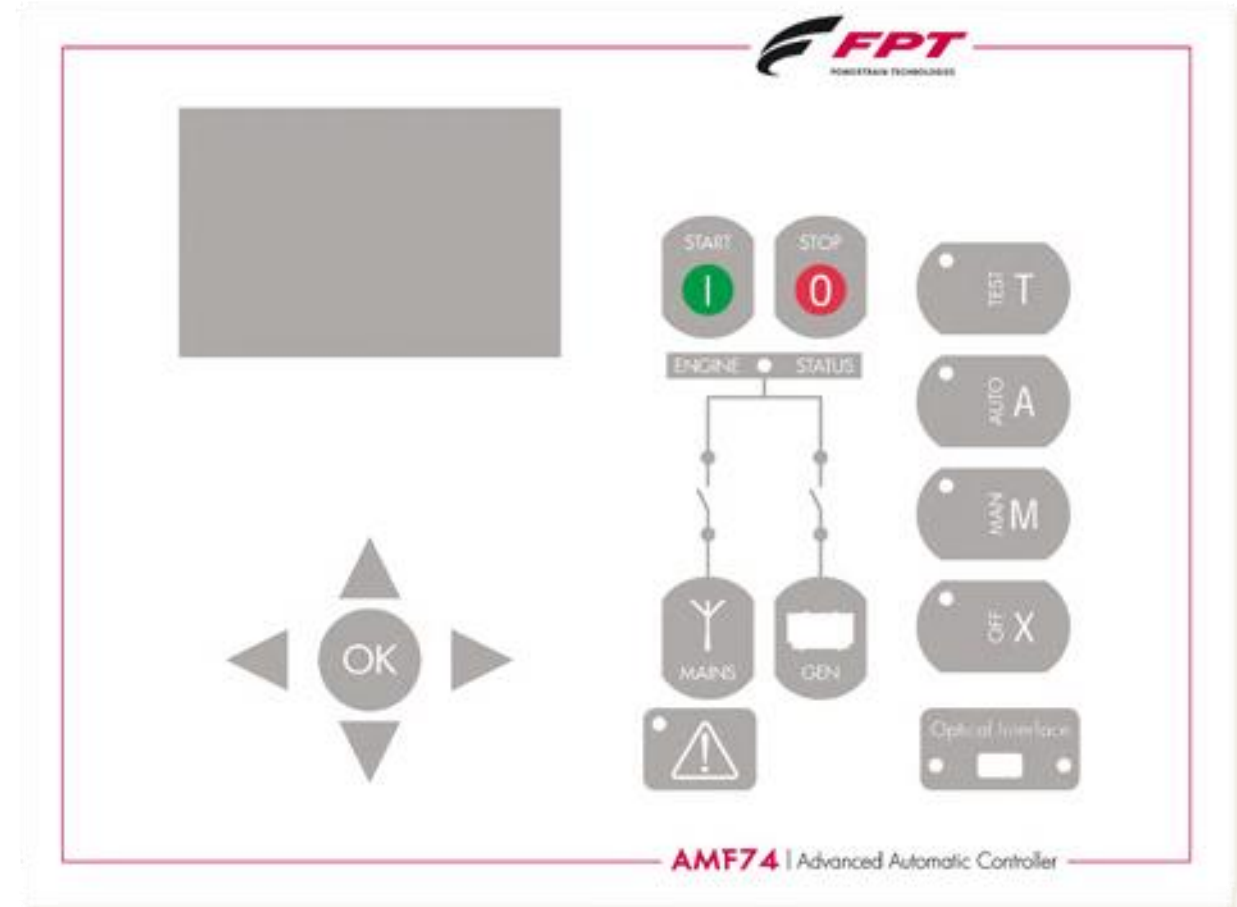

Manual panel MRS72

- Control of the generator with management of the remote starter from the main generator
- Graphic LCD display
- Five languages
- Real time clock with power reserve
- Storage of the last 250 events
- Support for remote installation and remote alarms
- Reprogrammable on-site by the operator with optical key

